

SOUTH CAROLINA PORTS AUTHORITY



Continuous Air Monitoring Station for the
Wando Welch Terminal

Q1 2016 Quarterly Report and Annual
Summary

April 2016

**SOUTH CAROLINA PORTS
AUTHORITY -
CONTINUOUS AIR
MONITORING STATION
FOR THE WANDO WELCH
TERMINAL**

**Q1 2016 Quarterly Report and Annual
Summary**

Prepared for:

South Carolina Ports Authority
176 Concord Street
Charleston
South Carolina 29401

Prepared by:

Arcadis U.S., Inc.
4915 Prospectus Drive
Suite F
Durham
North Carolina 27713
Tel 919 544 4535
Fax 919 544 5690

Our Ref.:
RN006310

Date:
April 2016

This document is intended only for the use of the individual or entity for which it was prepared and may contain information that is privileged, confidential and exempt from disclosure under applicable law. Any dissemination, distribution or copying of this document is strictly prohibited.

CONTENTS

1	Executive Summary	1
2	Project Description	2
2.1	Quarterly Results	2
3	Comparison to NAAQS	9
3.1	NO ₂	9
3.2	SO ₂	9
3.3	PM _{2.5}	10
4	Quality Assurance/Quality Control	10
4.1	Daily and Quarterly QC/Validation	10

TABLES

Table 2-1.	24-Hour Averages and NAAQS daily maximums.....	3
Table 2-2.	Quarterly Statistics	5
Table 2-3.	National Ambient Air Quality Standards	6
Table 2-4.	Monthly Statistics for All Four Quarters of the Fifth Monitoring Year	7
Table 2-5.	NO ₂ NAAQS Calculations for Wando Welch Terminal.....	9
Table 2-6.	SO ₂ NAAQS Calculations for Wando Welch Terminal.....	9
Table 2-7.	PM _{2.5} NAAQS Calculations for Wando Welch Terminal.....	10

FIGURES

Figure 2-1.	24-hour Averages	6
Figure 2-2.	Max 1-hour Averages	7
Figure 2-3.	Monthly Averages.....	8
Figure 2-4.	Monthly Max 1-hour Averages	8

1 EXECUTIVE SUMMARY

Arcadis was contracted in late December 2010 to provide Continuous Air Monitoring Services to the South Carolina Ports Authority (SCPA) at the Wando Welch Terminal in Mt. Pleasant, SC. Arcadis has followed through on the planned schedule and activities since that award. The major accomplishments were to complete the Quality Assurance Plan (QAP), purchase the instruments, complete the site setup, and then to begin acquiring data. This report is the 20th quarterly data report (fourth quarterly report in year five of operations) and presents the data summaries requested by SCPA and described in the scope of work. The data acquisition was started on May 6, 2011 in line with the court mandated start date. This report encompasses a period corresponding to data taken during the period from January 1, 2016 through March 31, 2016, and includes a summary of the fifth year of operations.

2 PROJECT DESCRIPTION

SCPA requested a system to provide ambient air quality data including particulate matter less than 2.5 microns (PM_{2.5}), SO₂, and NO₂ for a period of 5 years at the Wando Welch Terminal of the port of Charleston. Arcadis maintains the monitoring instruments, stocks consumables such as filters and calibration gases, and orders spare parts such that downtime will be minimized. Arcadis has established standard operating procedures to perform daily downloads and to provide Level 1 data validation for the resulting data. This monitoring project setup was relatively straightforward and has proven to be reliable and is generating valid high quality data suitable for use in dispersion modeling or other potential purposes.

The QAP is updated periodically to reflect improvements to the basic operating procedures or to document changes in the air quality standards. An update was performed on September 20, 2012, following the annual maintenance program and an on-site audit by the S.C. Department of Health and Environmental Control (conducted June 14-15, 2012) to reflect actual procedures at the end of the first year of operation. An update was also performed on October 17, 2013, to reflect changes to the National Ambient Air Quality Standards (NAAQS) for PM_{2.5}. This QAP is written consistent with the current ambient air quality standards for PM, NO_x and SO₂ as defined by the U.S. Environmental Protection Agency.

The location selected for sampling and the sampling equipment has proven to be well-suited for the project as it is centrally located to the port activities and is influenced by local sources and meteorological conditions. Although this is not a typical fence line site, it has proven to be well suited for the evaluation of port activities and related air quality effects. Arcadis has been able to remotely access the control computer and reliably interact with the instruments. The instruments are very responsive to events such as container handling equipment and the morning openings of the front gates to entering truck traffic. These patterns can be reviewed in the archived data any time in the future.

2.1 Quarterly Results

The 24-hr daily averages for PM_{2.5}, NO, NO₂, NO_x, and SO₂ and the maximum daily values for NO₂ (1-hr average) and SO₂ (1-hr and 3-hr average) for this period are shown in Table 2-1. No exceedances were indicated this quarter. Quarterly statistics showing averages, minimums and maximums for all parameters are summarized in Table 2-2, with the corresponding NAAQS limits shown in Table 2-3. 24-hr averages for all constituents are also shown graphically in Figure 2-1. Maximum 1-hr averages for NO₂ and SO₂ are shown in Figure 2-2. Statistics are broken down by months and summarized in Table 2-4.

Statistics for the fifth monitoring year are broken down by months and summarized in Table 2-4. Annual summaries are graphed in Figures 2-3 and 2-4 showing the monthly averages for all constituents and the daily maximum 1-hr averages for NO₂ and SO₂ averaged across the respective month.

Table 2-1. 24-Hour Averages and NAAQS daily maximums

24-hour Averages						Daily Max 1-hr Avg.		Daily Max 3-hr Avg.
Date	PM _{2.5} (µg/m ³)	NO (ppb)	NO ₂ (ppb)	NO _x (ppb)	SO ₂ (ppb)	NO ₂ (ppb)	SO ₂ (ppb)	SO ₂ (ppb)
1/1/16	2.25	0.01	1.57	1.49	0.00	2.66	0.00	0.00
1/2/16	3.40	0.00	1.04	0.90	0.00	1.04	0.00	0.00
1/3/16	*	*	*	*	*	*	*	*
1/4/16	8.97	4.79	6.52	11.29	0.00	14.15	0.03	0.02
1/5/16	3.88	3.16	6.33	9.48	0.08	14.21	1.04	0.53
1/6/16	4.44	5.54	6.56	12.10	0.00	14.71	0.03	0.01
1/7/16	*	*	*	*	*	*	*	*
1/8/16	*	*	*	*	*	*	*	*
1/9/16	*	*	*	*	*	*	*	*
1/10/16	*	*	*	*	*	*	*	*
1/11/16	6.35	12.37	18.48	30.85	0.15	30.38	0.77	0.47
1/12/16	9.99	19.32	18.87	38.19	0.02	32.15	0.12	0.08
1/13/16	9.06	10.88	16.07	26.94	0.29	32.19	1.74	1.09
1/14/16	12.22	16.59	20.27	36.85	0.02	35.63	0.12	0.06
1/15/16	4.99	9.39	12.29	21.66	0.00	33.68	0.00	0.00
1/16/16	7.33	1.48	5.22	6.69	0.00	21.04	0.00	0.00
1/17/16	10.25	2.47	7.19	9.66	0.06	19.66	0.40	0.20
1/18/16	7.89	10.27	10.36	20.63	0.09	18.11	0.31	0.19
1/19/16	6.02	5.78	9.77	15.55	0.96	14.98	2.70	1.41
1/20/16	5.92	7.76	11.53	19.29	0.11	31.35	0.72	0.31
1/21/16	9.96	4.80	9.86	14.65	0.15	28.17	1.09	0.73
1/22/16	4.74	2.79	7.36	10.13	0.00	16.70	0.00	0.00
1/23/16	9.32	3.94	7.61	11.55	0.56	12.99	3.92	1.96
1/24/16	9.49	1.95	7.84	9.78	1.18	25.23	2.98	1.76
1/25/16	21.11	25.00	21.21	46.20	0.37	34.96	1.51	1.25
1/26/16	13.79	55.81	24.01	79.79	0.32	58.54	1.39	0.94
1/27/16	12.02	15.50	14.45	29.92	0.12	34.46	0.63	0.44
1/28/16	9.36	6.77	8.67	15.40	0.12	16.72	0.71	0.54
1/29/16	8.42	10.52	16.90	27.39	0.12	31.73	0.43	0.27
1/30/16	10.14	8.18	10.34	18.48	0.04	27.97	0.21	0.12
1/31/16	15.13	4.97	8.83	13.75	0.09	26.05	1.11	0.40
2/1/16	12.91	18.49	19.48	37.94	0.04	50.16	0.20	0.11
2/2/16	12.13	7.13	11.08	18.19	0.03	35.20	0.36	0.13
2/3/16	9.37	9.88	8.92	18.79	0.00	19.19	0.01	0.00
2/4/16	4.71	17.87	16.29	34.14	0.04	38.43	0.49	0.16

24-hour Averages						Daily Max 1-hr Avg.		Daily Max 3-hr Avg.
Date	PM _{2.5} (µg/m ³)	NO (ppb)	NO ₂ (ppb)	NO _x (ppb)	SO ₂ (ppb)	NO ₂ (ppb)	SO ₂ (ppb)	SO ₂ (ppb)
2/5/16	6.47	5.48	8.80	14.26	0.07	14.95	0.39	0.21
2/6/16	5.22	1.05	3.34	4.35	0.00	11.77	0.02	0.01
2/7/16	4.67	0.97	4.53	5.47	0.14	17.32	1.01	0.61
2/8/16	9.97	12.83	16.71	29.54	0.23	30.61	0.82	0.58
2/9/16	6.42	5.86	7.28	13.12	0.04	14.48	0.29	0.12
2/10/16	6.01	6.12	7.29	13.37	0.19	16.62	0.84	0.43
2/11/16	10.85	8.09	14.34	22.41	0.16	34.17	0.44	0.39
2/12/16	12.85	6.82	13.39	20.20	0.07	31.15	0.68	0.31
2/13/16	11.71	3.66	8.07	11.72	0.37	25.48	1.30	1.03
2/14/16	6.21	0.24	1.87	2.08	0.02	3.68	0.16	0.06
2/15/16	8.45	4.95	7.86	12.78	0.00	20.01	0.01	0.00
2/16/16	4.60	8.56	14.48	23.03	0.02	28.26	0.19	0.07
2/17/16	8.63	9.20	13.19	22.36	0.25	31.92	1.37	0.74
2/18/16	8.97	2.94	7.80	10.72	0.07	15.89	0.45	0.26
2/19/16	8.23	3.00	8.05	11.04	0.04	22.46	0.12	0.10
2/20/16	10.53	14.07	12.92	26.96	0.10	39.05	0.46	0.25
2/21/16	10.63	3.01	9.92	12.92	0.12	23.18	0.60	0.46
2/22/16	15.67	17.94	18.63	36.55	0.24	42.36	1.00	0.65
2/23/16	12.09	16.44	14.80	31.20	0.03	35.24	0.19	0.15
2/24/16	8.32	6.36	7.04	13.37	0.00	14.99	0.01	0.01
2/25/16	4.76	8.89	11.35	20.22	0.07	20.96	0.41	0.17
2/26/16	6.74	6.17	12.08	18.23	0.13	25.56	0.49	0.43
2/27/16	9.05	1.12	5.75	6.86	0.06	16.49	0.22	0.14
2/28/16	13.07	0.89	3.83	4.71	0.09	15.94	0.30	0.23
2/29/16	13.10	5.96	10.51	16.47	0.12	28.11	0.31	0.24
3/1/16	17.25	13.36	17.46	30.81	0.19	47.49	0.67	0.55
3/2/16	7.00	6.73	12.15	18.87	0.05	22.78	0.16	0.07
3/3/16	6.70	2.52	6.18	8.69	0.02	17.14	0.07	0.06
3/4/16	7.51	5.07	10.76	15.81	0.07	24.02	0.35	0.20
3/5/16	8.67	1.24	5.48	6.70	0.01	16.47	0.04	0.03
3/6/16	10.56	0.51	5.85	6.34	0.04	25.94	0.15	0.13
3/7/16	13.23	9.18	12.75	21.91	0.02	26.27	0.08	0.06
3/8/16	9.72	33.06	19.69	52.73	0.11	43.03	0.98	0.62
3/9/16	4.74	40.19	20.09	60.27	0.11	47.34	0.67	0.52
3/10/16	6.77	21.51	14.40	35.89	0.04	59.47	0.37	0.24
3/11/16	7.22	5.66	9.93	15.58	0.03	21.90	0.17	0.11

24-hour Averages						Daily Max 1-hr Avg.		Daily Max 3-hr Avg.
Date	PM _{2.5} (µg/m ³)	NO (ppb)	NO ₂ (ppb)	NO _x (ppb)	SO ₂ (ppb)	NO ₂ (ppb)	SO ₂ (ppb)	SO ₂ (ppb)
3/12/16	6.31	4.78	6.37	11.13	0.00	24.72	0.02	0.01
3/13/16	7.55	0.51	2.54	3.02	0.02	5.44	0.07	0.06
3/14/16	9.17	8.67	10.98	19.63	0.03	25.89	0.11	0.09
3/15/16	11.90	5.70	13.24	18.93	0.11	25.57	0.80	0.42
3/16/16	24.07	6.76	14.56	21.31	0.13	29.62	0.69	0.32
3/17/16	28.93	19.57	24.49	44.04	0.25	46.64	1.24	0.81
3/18/16	16.13	4.49	9.27	13.74	0.03	32.52	0.20	0.11
3/19/16	11.64	3.74	7.84	11.55	0.01	34.58	0.08	0.04
3/20/16	6.17	0.44	2.61	3.03	0.01	6.57	0.06	0.02
3/21/16	8.41	8.27	15.69	23.96	0.29	28.46	1.15	0.66
3/22/16	15.86	10.69	16.36	27.05	0.31	37.60	1.98	1.40
3/23/16	12.31	4.33	10.01	14.33	0.13	35.96	1.07	0.70
3/24/16	10.99	9.14	10.96	20.06	0.09	38.62	0.46	0.36
3/25/16	8.29	4.52	9.58	14.07	0.03	25.33	0.13	0.07
3/26/16	6.39	1.12	4.89	5.94	0.00	17.99	0.01	0.01
3/27/16	3.96	0.08	1.59	1.58	0.00	3.41	0.00	0.00
3/28/16	6.18	5.56	10.14	15.65	0.02	25.24	0.16	0.06
3/29/16	9.79	2.84	8.56	11.38	0.03	26.69	0.19	0.12
3/30/16	9.07	1.49	5.45	6.93	0.01	13.80	0.02	0.02
3/31/16	9.53	4.72	7.28	11.94	0.00	20.20	0.01	0.00

* Data logger failure.

Table 2-2. Quarterly Statistics

24-hour Averages						Daily Max 1-hr Avg.		Daily Max 3-hr Avg.
Date	PM _{2.5} (µg/m ³)	NO (ppb)	NO ₂ (ppb)	NO _x (ppb)	SO ₂ (ppb)	NO ₂ (ppb)	SO ₂ (ppb)	SO ₂ (ppb)
Average	9.43	8.26	10.65	18.89	0.11	25.70	0.55	0.33
Minimum	2.25	0.00	1.04	0.90	0.00	1.04	0.00	0.00
Maximum	28.93	55.81	24.49	79.79	1.18	59.47	3.92	1.96

Table 2-3. National Ambient Air Quality Standards

Pollutant	Primary/ Secondary	Averaging Time	Level	Form
NO ₂	Primary	1-hour	100 ppb	98th Percentile, averaged over 3 years
	Primary and Secondary	Annual	53 ppb ⁽¹⁾	Annual Mean
SO ₂	Primary	1-hour	75 ppb ⁽²⁾	99th Percentile of 1-hour daily maximum concentrations, averaged over 3 years
	Secondary	3-hour	0.5 ppm	Not to be exceeded more than once per year
PM _{2.5}	Primary	Annual	12 µg/m ³	Annual mean, averaged over 3 years
	Secondary	Annual	15 µg/m ³	Annual mean, averaged over 3 years
	Primary and Secondary	24-hour	35 µg/m ³	98th Percentile, averaged over 3 years

- (1) The official level of the annual NO₂ standard is 0.053 ppm, equal to 53 ppb, which is shown here for the purpose of clearer comparison to the 1-hour standard.
- (2) Final rule signed June 2, 2010. The 1971 annual and 24-hour SO₂ standards were revoked in that same rulemaking. However, these standards remain in effect until one year after an area is designated for the 2010 standard, except in areas designated nonattainment for the 1971 standards, where the 1971 standards remain in effect until implementation plans to attain or maintain the 2010 standard are approved.

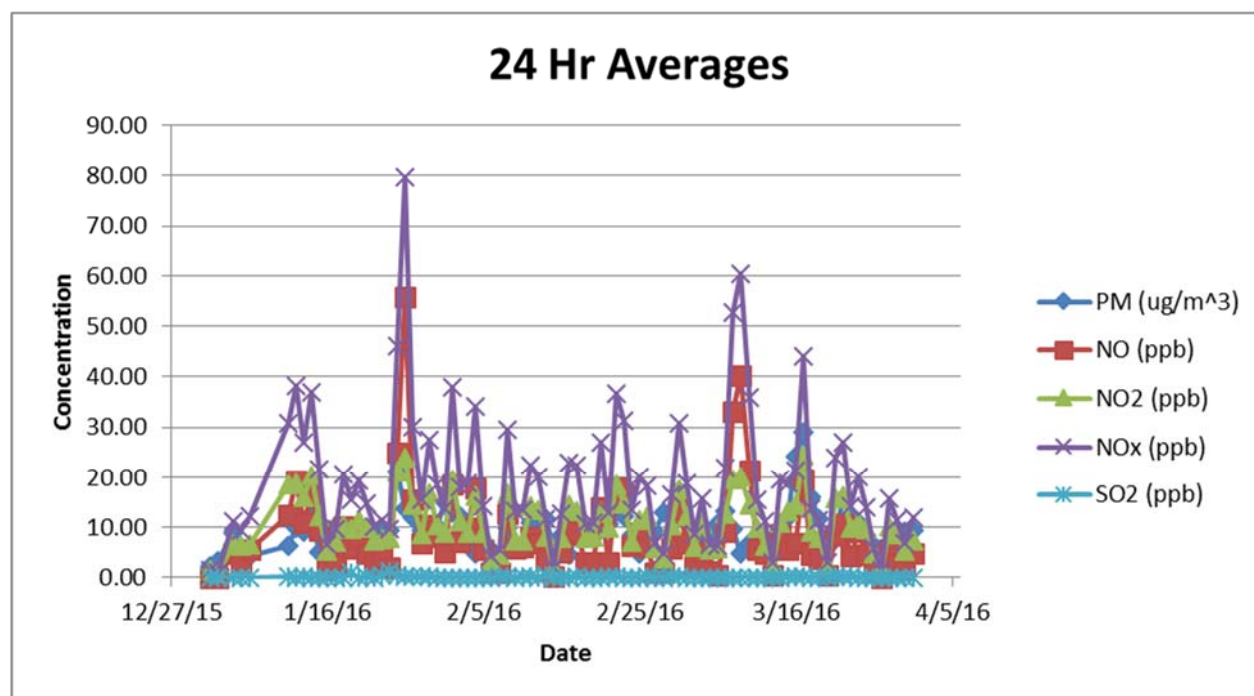


Figure 2-1. 24-hour Averages

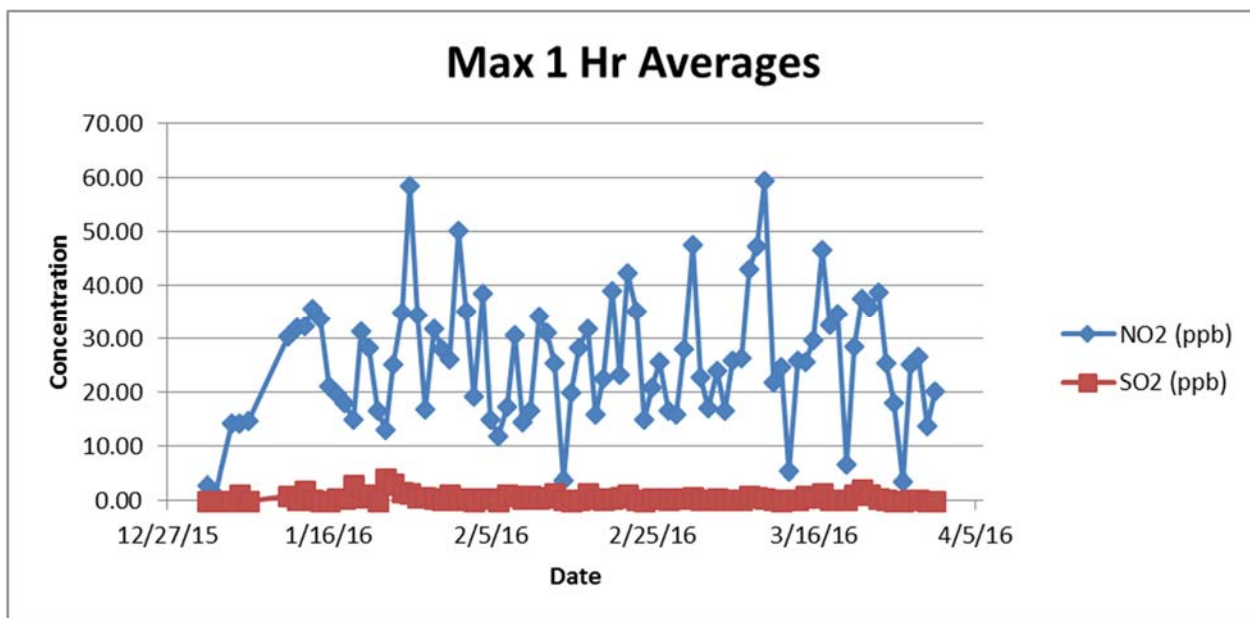


Figure 2-2. Max 1-hour Averages

Table 2-4. Monthly Statistics for All Four Quarters of the Fifth Monitoring Year

Monthly Averages						Monthly Daily Max 1-hr Avg.		Daily Max 3-hr Avg.
Month	PM _{2.5} ($\mu\text{g}/\text{m}^3$)	NO (ppb)	NO ₂ (ppb)	NO _x (ppb)	SO ₂ (ppb)	NO ₂ (ppb)	SO ₂ (ppb)	SO ₂ (ppb)
4/15	7.69	5.68	8.61	14.13	0.09	22.13	0.87	0.38
5/15	8.83	4.61	7.41	11.98	0.08	18.34	0.80	0.36
6/15	11.01	4.42	6.18	10.43	0.00	12.25	0.03	0.01
7/15	10.35	5.81	6.10	11.80	0.01	15.09	0.15	0.07
8/15	9.33	5.31	5.17	10.63	0.01	13.45	0.22	0.09
9/15	7.62	5.93	7.13	13.17	0.04	16.38	0.43	0.09
10/15	7.50	3.80	6.25	10.05	0.00	13.65	0.04	0.01
11/15	7.26	4.75	6.34	11.06	0.04	14.51	0.20	0.10
12/15	9.48	11.08	9.78	20.83	0.03	22.65	0.19	0.12
1/16	8.71	9.62	11.12	20.72	0.19	24.21	0.85	0.49
2/16	9.05	7.38	10.33	17.69	0.09	24.95	0.45	0.28
3/16	10.39	7.95	10.55	18.48	0.07	27.64	0.39	0.25

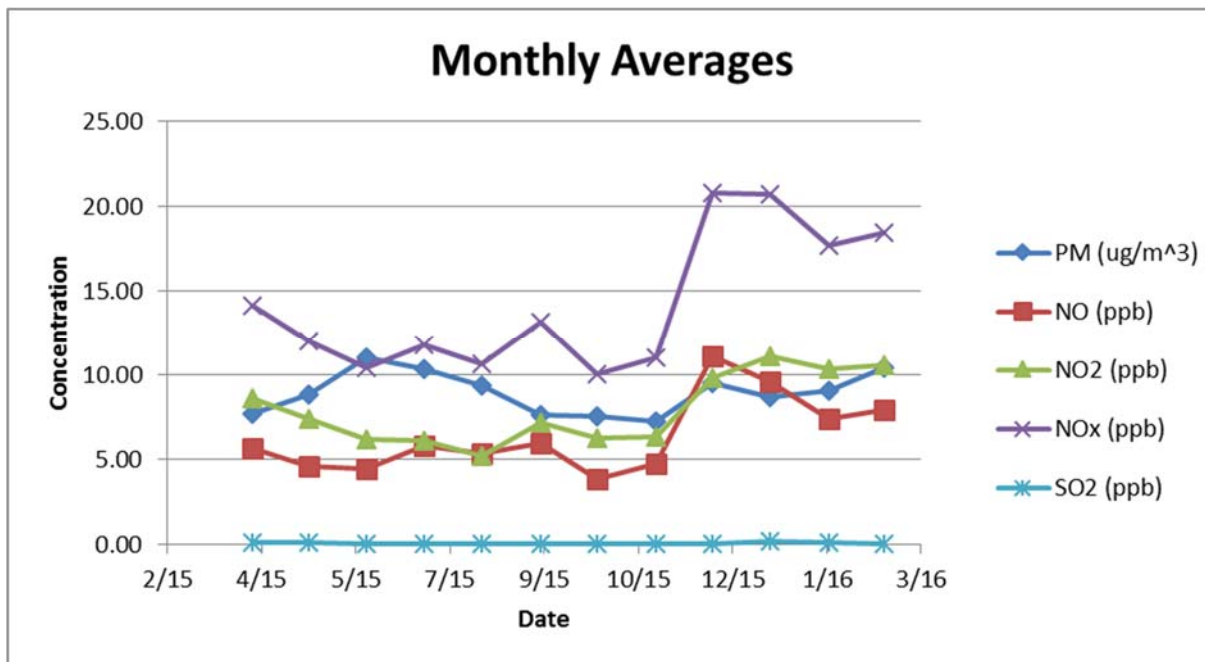


Figure 2-3. Monthly Averages

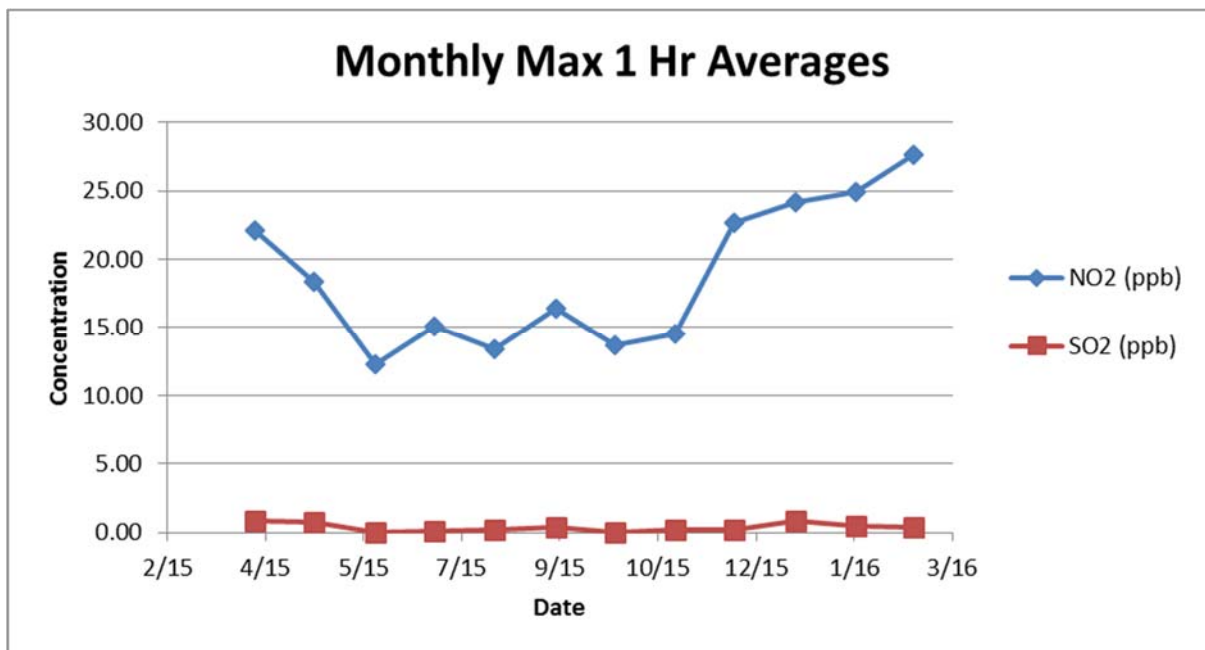


Figure 2-4. Monthly Max 1-hour Averages

3 COMPARISON TO NAAQS

Pollutant levels for all measured components at the Wando Welch ambient air monitoring station are below the National Ambient Air Quality Standards (NAAQS). This report marks the five year anniversary of the Wando monitoring station. Many of the NAAQS levels are based on three-year averages. These values have been calculated from the Wando data for comparison to the standard.

3.1 NO₂

The primary standard for NO₂ is 53 ppb (annual arithmetic average) or 100 ppb (3-year average of the 98th percentile of the daily maximum 1-hour average must not exceed 100 ppb). Table 2-4 and Figures 2-3 and 2-4 show that the monthly averages and monthly daily maximum 1-hr averages were below 53 ppb for this fifth year of monitoring (as they were for all previous years of monitoring). Table 2-5 presents the NO₂ NAAQS calculations for each standard.

Table 2-5. NO₂ NAAQS Calculations for Wando Welch Terminal

Pollutant	Primary/ Secondary	Averaging Time	Level	Form	Wando Welch
NO ₂	Primary	1-hour	100 ppb	98th Percentile, averaged over 3 years	39 ppb
NO ₂	Primary and Secondary	Annual	53 ppb	Annual Mean	Year 2: 8 ppb Year 3: 9 ppb Year 4: 8 ppb

3.2 SO₂

The primary standard for SO₂ is 75 ppb (3-year average of the 99th percentile of the daily maximum 1-hour average must not exceed 75 ppb). The secondary standard for SO₂ is 0.5 ppm (500 ppb; 3-hour average not to be exceeded more than once per year). Table 2-4 and Figures 2-3 and 2-4 show that the monthly averages and monthly daily maximum 1-hr averages were below 75 ppb for this fifth year of monitoring (as they were for all previous years of monitoring), and that the secondary standard was never exceeded. Table 2-6 presents the SO₂ NAAQS calculations for each standard.

Table 2-6. SO₂ NAAQS Calculations for Wando Welch Terminal

Pollutant	Primary/ Secondary	Averaging Time	Level	Form	Wando Welch
SO ₂	Primary	1-hour	75 ppb	99th Percentile of 1-hour daily maximum concentrations, averaged over 3 years	9 ppb
SO ₂	Secondary	3-hour	0.5 ppm (500 ppb)	Not to be exceeded more than once per year	2.32 ppb*

* Maximum since 7/14. Values were not calculated prior to this time.

3.3 PM_{2.5}

The primary standard for PM_{2.5} is 12.0 µg/m³ (annual arithmetic average; 3-year average of the weighted annual mean PM_{2.5} concentration must not exceed 12.0 µg/m³) or 35.0 µg/m³ (24-hour average; 3-year average of the 98th percentile of the 24-hour concentrations must not exceed 35.0 µg/m³). The secondary standard for PM_{2.5} is 15.0 µg/m³ (annual arithmetic average; 3-year average of the weighted annual mean PM_{2.5} concentration must not exceed 15.0 µg/m³). Table 2-4 and Figure 2-3 show the monthly averages never exceed 11.01 µg/m³. Table 2-7 presents the PM_{2.5} NAAQS calculations for each standard, and shows that the Wando Welch Terminal had no exceedances.

Table 2-7. PM_{2.5} NAAQS Calculations for Wando Welch Terminal

Pollutant	Primary/ Secondary	Averaging Time	Level	Form	Wando Welch
PM _{2.5}	Primary	Annual	12 µg/m ³	Annual mean, averaged over 3 years	9.3 µg/m ³
PM _{2.5}	Secondary	Annual	15 µg/m ³	Annual mean, averaged over 3 years	9.3 µg/m ³
PM _{2.5}	Primary and Secondary	24-hour	35 µg/m ³	98th Percentile, averaged over 3 years	18 µg/m ³

4 QUALITY ASSURANCE/QUALITY CONTROL

QA/QC procedures applied to this project are described in a Quality Assurance Plan titled Continuous Air Monitoring Station for the Wando Welch Terminal (October 17, 2013, Revision 3).

4.1 Daily and Quarterly QC/Validation

According to the QAP prepared for this work, results were reviewed for anomalies and validated on a daily basis. These validations are recorded on QA/QC Daily Comment Sheets. The occurrence and duration of normal calibration and maintenance activities are also recorded.

Daily QC checks were performed in accordance with section 5.1 of the QAPP. The data acquisition system (Opto 22's PAC Display) is remotely accessed from the Arcadis office located in Durham, NC, where instrumentation and trends are monitored for alarms and other irregularities. NO_x and SO₂ zero and calibration information is displayed by the system from the most recent calibration event and are recorded in the QC Log Book. After checking for irregularities, the data file from the previous day is sent via email to the Durham, NC office. The file is saved to a common folder on the Durham office's server and then post processed with a Microsoft Excel macro. The resulting Excel file provides values for daily averages and maxima, and also alarm and calibration information. This summary information is recorded on the daily QC log sheet. Comments and observations regarding data quality are noted on the QC log sheet, and are also entered into the SCPA QA/QC Daily Comment Sheet. The Arcadis Project Manager is notified of any issues immediately.

Percent completeness for Quarter 1 was calculated by dividing both the number of hours flagged by the macro as “Insufficient Data” as well as hours for which no data was obtained by the total number of hours in the quarter. Each of the three instruments (5014i, 42i, and 43i) typically produces 24 hours of data each day, for a total of 72 hours per day of recorded data. Problems with the data acquisition system, normal calibration periods for the NO_x and SO₂ instruments, and normal maintenance of the PM instrument during Quarter 4 resulted in instances of incomplete or invalid data.

The data for this quarter were assessed as follows:

- 100% of the validated data were flagged as “good”.
- Percent completeness was 89.65%.

The QAP stated a completeness goal of 75% for PM_{2.5}, SO₂ and NO_x. The data collected from January 1, 2016 through March 31, 2016 met this goal.

Arcadis U.S., Inc.

4915 Prospectus Drive

Suite F

Durham, North Carolina 27713

Tel 919 544 4535

Fax 919 544 5690

www.arcadis.com