

# **SOUTH CAROLINA PORTS AUTHORITY**



**SOUTH  
CAROLINA  
PORTS**

Continuous Air Monitoring Station for the  
Wando Welch Terminal

Q1 2019 Quarterly Report and Annual  
Summary

May 2019

---

**SOUTH CAROLINA PORTS  
AUTHORITY -  
CONTINUOUS AIR  
MONITORING STATION  
FOR THE WANDO WELCH  
TERMINAL**

**Q1 2019 Quarterly Report and Annual  
Summary**

Prepared for:

South Carolina Ports Authority  
176 Concord Street  
Charleston  
South Carolina 29401

Prepared by:

Arcadis U.S., Inc.  
4915 Prospectus Drive  
Suite G  
Durham  
North Carolina 27713  
Tel 919 544 4535  
Fax 919 544 5690

Our Ref.:  
RN006310

Date:  
May 2019

*This document is intended only for the use of the individual or entity for which it was prepared and may contain information that is privileged, confidential and exempt from disclosure under applicable law. Any dissemination, distribution or copying of this document is strictly prohibited.*

## CONTENTS

1	Executive Summary .....	1
2	Project Description .....	2
2.1	Quarterly Results .....	2
3	Comparison to NAAQS .....	9
3.1	NO <sub>2</sub> .....	9
3.2	SO <sub>2</sub> .....	9
3.3	PM <sub>2.5</sub> .....	10
4	Quality Assurance/Quality Control .....	11
4.1	Daily and Quarterly QC/Validation .....	11

## TABLES

Table 2-1.	24-Hour Averages and daily maximums .....	3
Table 2-2.	Quarterly Statistics .....	5
Table 2-3.	National Ambient Air Quality Standards .....	6
Table 2-4.	Monthly Statistics for All Four Quarters of the Eighth Monitoring Year .....	7
Table 2-5.	NO <sub>2</sub> NAAQS Calculations for Wando Welch Terminal.....	9
Table 2-6.	SO <sub>2</sub> NAAQS Calculations for Wando Welch Terminal.....	9
Table 2-7.	PM <sub>2.5</sub> NAAQS Calculations for Wando Welch Terminal.....	10

## FIGURES

Figure 2-1.	24-hour Averages .....	6
Figure 2-2.	Max 1-hour Averages .....	7
Figure 2-3.	Monthly Averages.....	8
Figure 2-4.	Monthly Max 1-hour Averages .....	8

## 1 EXECUTIVE SUMMARY

Arcadis was contracted in late December 2010 to provide continuous air monitoring services to the South Carolina Ports Authority (SCPA) at the Wando Welch Terminal in Mt. Pleasant, SC. Arcadis has followed through on the planned schedule and activities since that award. The major accomplishments were to complete the Quality Assurance Plan (QAP), purchase the instruments, complete the site setup, and then to begin acquiring data. This report is the 32<sup>nd</sup> quarterly data report (fourth quarterly report in year eight of operations) and presents the data summaries requested by SCPA and described in the scope of work. The data acquisition was started on May 6, 2011 in line with the court mandated start date. This report encompasses a period corresponding to data taken during the period from January 1, 2019 through March 31, 2019 and includes a summary of the eighth year of operations.

## 2 PROJECT DESCRIPTION

SCPA requested a system to provide ambient air quality data including particulate matter less than 2.5 microns (PM<sub>2.5</sub>), SO<sub>2</sub>, and NO<sub>2</sub> for a period of 5 years at the Wando Welch Terminal of the port of Charleston. Arcadis maintains the monitoring instruments, stocks consumables such as filters and calibration gases, and orders spare parts such that downtime will be minimized. Arcadis has established standard operating procedures to perform daily downloads and to provide Level 1 data validation for the resulting data. The air monitoring project has proven to be reliable and is generating valid high-quality data suitable for use in dispersion modeling or other potential purposes.

The QAP is updated periodically to reflect improvements to the basic operating procedures or to document changes in the air quality standards. An update was performed on September 20, 2012, following the annual maintenance program and an on-site audit by the S.C. Department of Health and Environmental Control (conducted June 14-15, 2012) to reflect actual procedures at the end of the first year of operation. An update was also performed on October 17, 2013, to reflect changes to the National Ambient Air Quality Standards (NAAQS) for PM<sub>2.5</sub>. This QAP is written consistent with the current ambient air quality standards for PM, NO<sub>x</sub> and SO<sub>2</sub> as defined by the U.S. Environmental Protection Agency.

The location selected for sampling and the sampling equipment has proven to be well-suited for the project as it is centrally located to the port activities and is influenced by local sources and meteorological conditions. Although this is not a typical fence line site, it has proven to be well suited for the evaluation of port activities and related air quality effects. Arcadis has been able to remotely access the control computer and reliably interact with the instruments. The instruments are very responsive to events such as container handling equipment and the morning openings of the front gates to entering truck traffic. These patterns can be reviewed in the archived data any time in the future.

### 2.1 Quarterly Results

The 24-hr daily averages for PM<sub>2.5</sub>, NO, NO<sub>2</sub>, NO<sub>x</sub>, and SO<sub>2</sub> and the maximum daily values for NO<sub>2</sub> (1-hr average) and SO<sub>2</sub> (1-hr and 3-hr average) for this period are shown in Table 2-1. Quarterly statistics showing averages, minimums and maximums for all parameters are summarized in Table 2-2, with the corresponding NAAQS limits shown in Table 2-3. 24-hr averages for all constituents are also shown graphically in Figure 2-1. Maximum 1-hr averages for NO<sub>2</sub> and SO<sub>2</sub> are shown in Figure 2-2. Statistics are broken down by months and summarized in Table 2-4.

Statistics for the eighth monitoring year are broken down by months and summarized in Table 2-4. Annual summaries are graphed in Figures 2-3 and 2-4 showing the monthly averages for all constituents and the daily maximum 1-hr averages for NO<sub>2</sub> and SO<sub>2</sub> averaged across the respective month.

Table 2-1. 24-Hour Averages and daily maximums

Date	24-hour Averages					Daily Max 1-hr Avg.		Daily Max 3-hr Avg.
	PM <sub>2.5</sub> (µg/m <sup>3</sup> )	NO (ppb)	NO <sub>2</sub> (ppb)	NO <sub>x</sub> (ppb)	SO <sub>2</sub> (ppb)	NO <sub>2</sub> (ppb)	SO <sub>2</sub> (ppb)	SO <sub>2</sub> (ppb)
1/1/19	^	0.25	2.75	2.83	0.01	5.95	0.05	0.03
1/2/19	11.86	39.46	10.45	49.85	0.02	22.97	0.19	0.11
1/3/19	5.45	24.68	12.04	36.69	0.00	24.53	0.00	0.00
1/4/19	8.47	19.66	8.51	27.95	0.00	22.33	0.00	0.00
1/5/19	9.65	9.19	11.37	20.56	0.00	21.14	0.01	0.00
1/6/19	7.29	9.57	12.48	22.02	0.02	24.60	0.39	0.18
1/7/19	11.12	27.89	15.21	43.02	0.01	25.95	0.11	0.04
1/8/19	10.37	27.84	16.15	43.98	0.09	29.31	0.59	0.26
1/9/19	6.82	13.10	16.71	29.79	0.01	25.99	0.09	0.04
1/10/19	8.91	8.55	11.46	20.00	0.05	19.45	0.24	0.10
1/11/19	8.89	7.26	6.20	13.38	0.02	13.48	0.15	0.07
1/12/19	7.70	3.12	4.46	7.49	0.00	12.94	0.00	0.00
1/13/19	8.93	0.98	2.27	3.20	0.00	7.52	0.01	0.00
1/14/19	7.03	11.10	9.14	20.22	0.01	16.22	0.04	0.03
1/15/19	10.62	14.35	9.89	24.15	0.35	18.64	1.43	1.17
1/16/19	11.13	19.66	14.20	33.82	0.08	27.51	1.00	0.53
1/17/19	14.62	53.55	16.48	69.84	0.12	28.64	0.65	0.41
1/18/19	13.93	21.92	17.03	38.88	0.09	40.70	0.92	0.53
1/19/19	10.09	4.20	5.12	9.20	0.00	15.19	0.04	0.02
1/20/19	11.92	3.24	5.56	8.76	0.05	16.11	1.02	0.39
1/21/19	5.77	5.98	7.42	13.35	0.12	15.31	0.43	0.26
1/22/19	4.85	5.03	6.46	11.42	0.14	19.71	0.53	0.39
1/23/19	2.25	25.28	11.44	36.64	0.04	47.75	0.81	0.31
1/24/19	13.00	12.89	11.27	24.15	0.00	24.12	0.02	0.01
1/25/19	8.94	14.78	14.73	29.50	0.24	24.73	2.11	1.05
1/26/19	14.75	14.26	17.42	31.68	0.37	26.77	2.64	1.88
1/27/19	15.37	13.04	9.29	22.27	0.01	21.92	0.06	0.02
1/28/19	9.55	15.91	12.50	28.30	0.07	28.75	0.44	0.24
1/29/19	8.14	18.42	17.05	35.43	0.04	46.28	0.40	0.23
1/30/19	8.27	15.59	13.83	29.39	0.46	21.02	2.20	1.32
1/31/19	11.02	18.80	15.67	34.41	0.56	35.48	2.14	1.33
2/1/19	9.27	16.00	13.73	29.64	0.03	29.54	0.28	0.22
2/2/19	5.74	3.77	6.85	10.49	0.00	28.53	0.05	0.03
2/3/19	7.05	0.56	2.82	3.30	0.00	12.55	0.00	0.00

Q1 2019 Report and Annual Summary

24-hour Averages						Daily Max 1-hr Avg.		Daily Max 3-hr Avg.
Date	PM <sub>2.5</sub> (µg/m <sup>3</sup> )	NO (ppb)	NO <sub>2</sub> (ppb)	NO <sub>x</sub> (ppb)	SO <sub>2</sub> (ppb)	NO <sub>2</sub> (ppb)	SO <sub>2</sub> (ppb)	SO <sub>2</sub> (ppb)
2/4/19	12.57	19.80	19.03	38.75	0.18	33.10	0.92	0.68
2/5/19	10.71	28.45	19.70	48.14	0.15	31.67	1.56	0.62
2/6/19	12.46	79.88	19.00	98.84	0.23	33.59	1.55	0.73
2/7/19	*	*	*	*	*	*	*	*
2/8/19	*	*	*	*	*	*	*	*
2/9/19	*	*	*	*	*	*	*	*
2/10/19	*	*	*	*	*	*	*	*
2/11/19	10.76	5.87	5.78	11.65	0.01	16.22	0.02	0.00
2/12/19	9.02	29.84	12.94	42.74	0.00	26.15	0.02	0.01
2/13/19	7.60	15.08	17.82	32.90	0.63	22.70	3.02	2.09
2/14/19	5.52	21.78	15.83	37.53	0.21	29.28	0.79	0.52
2/15/19	10.44	12.39	17.42	29.76	0.13	38.57	0.58	0.41
2/16/19	6.14	7.36	12.03	19.32	0.02	28.01	0.03	0.02
2/17/19	4.55	4.43	1.29	5.72	0.00	2.70	0.01	0.00
2/18/19	11.59	17.65	13.89	31.52	0.19	26.58	1.86	0.71
2/19/19	8.94	4.90	6.38	11.20	0.03	13.22	0.10	0.07
2/20/19	8.69	14.42	12.07	26.45	0.02	29.75	0.08	0.05
2/21/19	4.08	29.24	8.10	37.26	0.00	16.42	0.01	0.00
2/22/19	11.23	14.71	6.76	21.38	0.07	19.55	0.66	0.40
2/23/19	6.40	2.34	3.14	5.32	0.01	10.55	0.03	0.02
2/24/19	13.80	0.78	2.96	3.67	0.04	7.01	0.28	0.12
2/25/19	7.39	7.58	13.64	21.19	0.31	28.99	2.14	0.75
2/26/19	9.90	33.10	16.64	49.67	0.14	39.68	1.04	0.59
2/27/19	4.07	24.96	20.02	44.86	0.04	40.12	0.42	0.25
2/28/19	16.69	17.18	16.71	33.84	0.20	24.51	2.19	1.02
3/1/19	16.66	30.18	13.97	44.10	0.09	29.72	0.46	0.35
3/2/19	10.82	5.69	6.12	11.79	0.05	11.65	0.30	0.21
3/3/19	8.13	0.71	2.91	3.58	0.00	8.90	0.06	0.02
3/4/19	12.09	12.50	9.42	21.90	0.05	17.54	0.46	0.26
3/5/19	11.54	15.59	11.86	27.30	0.06	24.83	0.38	0.25
3/6/19	8.78	7.94	12.62	20.53	0.40	20.80	1.71	0.94
3/7/19	13.47	15.79	17.72	33.46	0.27	43.07	1.73	1.08
3/8/19	11.09	38.97	22.07	60.99	0.16	57.21	0.91	0.63
3/9/19	10.81	12.55	13.31	25.81	0.23	37.71	1.62	1.28
3/10/19	5.46	0.52	3.90	4.37	0.02	11.16	0.07	0.05

24-hour Averages						Daily Max 1-hr Avg.		Daily Max 3-hr Avg.
Date	PM <sub>2.5</sub> (µg/m <sup>3</sup> )	NO (ppb)	NO <sub>2</sub> (ppb)	NO <sub>x</sub> (ppb)	SO <sub>2</sub> (ppb)	NO <sub>2</sub> (ppb)	SO <sub>2</sub> (ppb)	SO <sub>2</sub> (ppb)
3/11/19	12.22	15.08	11.72	26.76	0.06	30.06	0.28	0.19
3/12/19	9.60	4.55	10.89	15.37	0.03	24.62	0.10	0.08
3/13/19	6.62	17.04	13.03	29.94	0.02	31.95	0.07	0.06
3/14/19	11.19	30.79	14.48	45.09	0.05	48.89	0.47	0.31
3/15/19	6.14	5.48	8.76	14.15	0.00	28.21	0.00	0.00
3/16/19	17.25	4.59	8.55	13.09	0.08	17.45	0.75	0.33
3/17/19	7.23	0.13	1.34	1.33	0.01	8.93	0.03	0.02
3/18/19	10.93	14.25	11.55	25.61	0.06	30.97	0.23	0.20
3/19/19	12.38	4.52	7.97	12.42	0.02	18.59	0.21	0.08
3/20/19	13.58	6.85	8.42	15.21	0.01	24.62	0.08	0.04
3/21/19	11.08	8.40	12.30	20.60	0.10	29.35	0.30	0.18
3/22/19	11.33	7.89	13.18	20.88	0.29	26.41	2.70	1.85
3/23/19	12.96	0.72	2.47	2.90	0.11	15.64	0.36	0.14
3/24/19	8.38	1.16	4.06	5.12	0.00	16.59	0.05	0.00
3/25/19	8.46	13.18	14.49	27.66	0.01	44.62	0.04	0.03
3/26/19	11.84	5.14	10.04	15.16	0.00	26.53	0.00	0.00
3/27/19	6.95	3.50	7.01	10.50	0.00	15.11	0.00	0.00
3/28/19	6.63	6.89	7.79	14.63	0.00	23.03	0.02	0.01
3/29/19	6.69	22.80	9.89	32.59	0.17	22.92	2.29	1.04
3/30/19	6.33	21.53	10.84	32.35	0.03	34.33	0.33	0.15
3/31/19	9.34	0.20	2.65	2.82	0.00	6.56	0.00	0.00

^ Data acquisition system fault.

\* System connectivity error.

Table 2-2. Quarterly Statistics

24-hour Averages						Daily Max 1-hr Avg.		Daily Max 3-hr Avg.
Date	PM <sub>2.5</sub> (µg/m <sup>3</sup> )	NO (ppb)	NO <sub>2</sub> (ppb)	NO <sub>x</sub> (ppb)	SO <sub>2</sub> (ppb)	NO <sub>2</sub> (ppb)	SO <sub>2</sub> (ppb)	SO <sub>2</sub> (ppb)
Average	9.62	14.26	10.87	25.06	0.09	24.51	0.61	0.35
Minimum	2.25	0.13	1.29	1.33	0.00	2.70	0.00	0.00
Maximum	17.25	79.88	22.07	98.84	0.63	57.21	3.02	2.09



Table 2-3. National Ambient Air Quality Standards

Pollutant	Primary/Secondary	Averaging Time	Level	Form
NO <sub>2</sub>	Primary	1-hour	100 ppb	98th Percentile, averaged over 3 years
	Primary and Secondary	Annual	53 ppb <sup>(1)</sup>	Annual Mean
SO <sub>2</sub>	Primary	1-hour	75 ppb <sup>(2)</sup>	99th Percentile of 1-hour daily maximum concentrations, averaged over 3 years
	Secondary	3-hour	0.5 ppm	Not to be exceeded more than once per year
PM <sub>2.5</sub>	Primary	Annual	12 µg/m <sup>3</sup>	Annual mean, averaged over 3 years
	Secondary	Annual	15 µg/m <sup>3</sup>	Annual mean, averaged over 3 years
	Primary and Secondary	24-hour	35 µg/m <sup>3</sup>	98th Percentile, averaged over 3 years

- (1) The level of the annual NO<sub>2</sub> standard is 0.053 ppm. It is shown here in terms of ppb for the purposes of clearer comparison to the 1-hour standard level.
- (2) The previous SO<sub>2</sub> standards (0.14 ppm 24-hour and 0.03 ppm annual) will additionally remain in effect in certain areas: (1) any area for which it is not yet 1 year since the effective date of designation under the current (2010) standards, and (2) any area for which an implementation plan providing for attainment of the current (2010) standard has not been submitted and approved and which is designated nonattainment under the previous SO<sub>2</sub> standards or is not meeting the requirements of a SIP call under the previous SO<sub>2</sub> standards (40 CFR 50.4(3)). A SIP call is an EPA action requiring a state to resubmit all or part of its State Implementation Plan to demonstrate attainment of the required NAAQS.

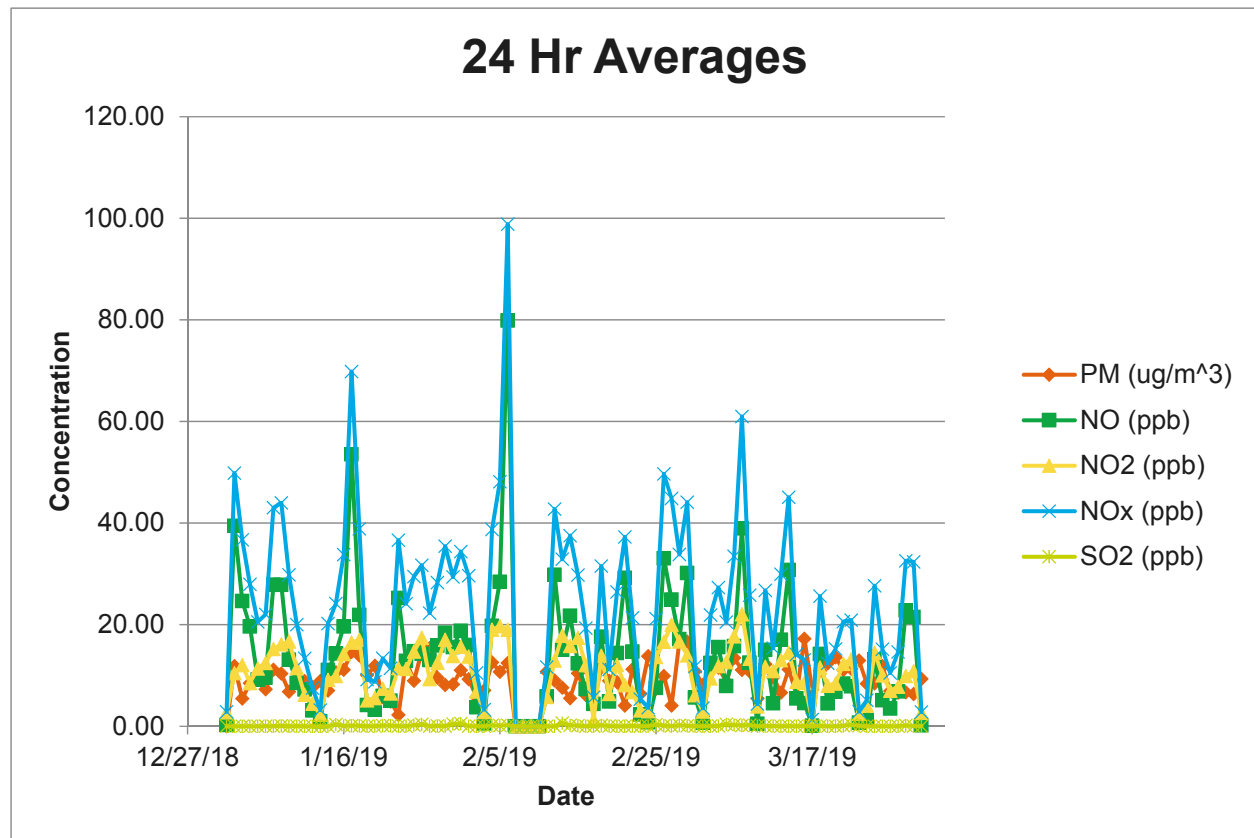


Figure 2-1. 24-hour Averages

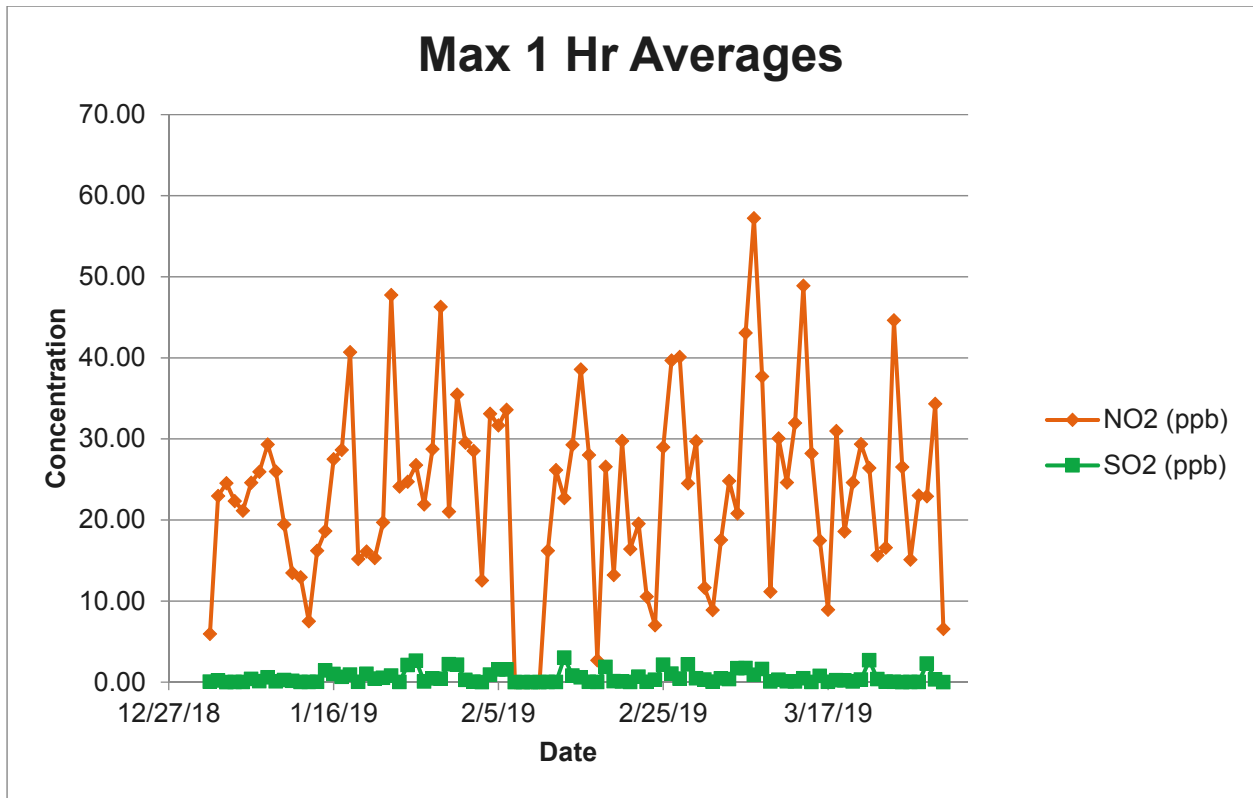


Figure 2-2. Max 1-hour Averages

Table 2-4. Monthly Statistics for the Eighth Monitoring Year

Month	Monthly Averages					Monthly Daily Max 1-hr Avg.		Daily Max 3-hr Avg.
	PM <sub>2.5</sub> (µg/m <sup>3</sup> )	NO (ppb)	NO <sub>2</sub> (ppb)	NO <sub>x</sub> (ppb)	SO <sub>2</sub> (ppb)	NO <sub>2</sub> (ppb)	SO <sub>2</sub> (ppb)	SO <sub>2</sub> (ppb)
4/18	8.61	10.67	10.60	21.13	0.10	26.76	0.62	0.36
5/18	9.29	19.91	11.59	31.47	0.11	39.05	0.73	0.46
6/18	18.18	8.34	11.28	19.45	0.10	26.71	0.41	0.27
7/18	11.42	6.66	9.22	15.76	0.13	22.81	0.47	0.34
8/18	10.50	8.63	6.69	16.41	0.03	16.14	0.24	0.13
9/18	15.35	7.04	4.69	11.53	0.04	13.51	0.19	0.11
10/18	8.62	11.07	8.58	18.85	0.05	19.86	0.36	0.18
11/18	10.88	12.47	9.07	21.44	0.07	19.53	0.48	0.33
12/18	9.16	17.98	10.73	28.65	0.05	23.99	0.37	0.27
1/19	9.56	15.47	11.11	26.52	0.10	23.58	0.60	0.35
2/19	8.94	17.17	11.86	28.96	0.11	24.54	0.74	0.39
3/19	10.19	10.81	9.85	20.58	0.08	25.42	0.52	0.32

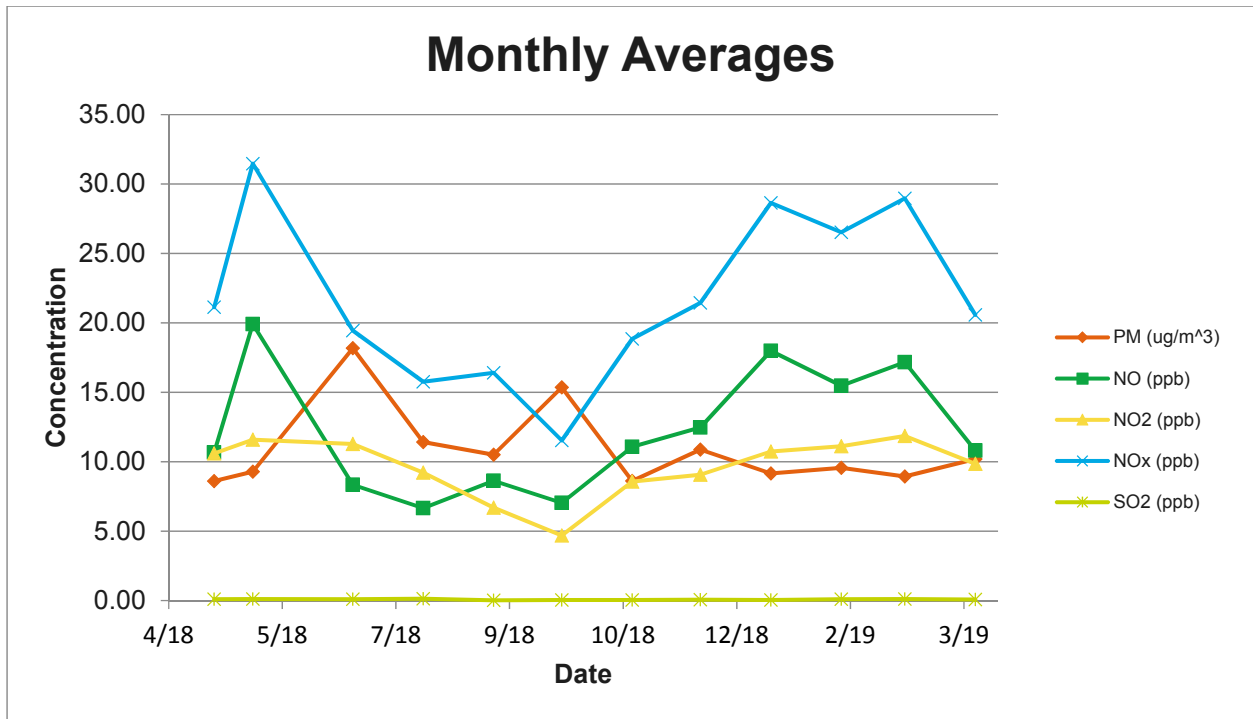


Figure 2-3. Monthly Averages

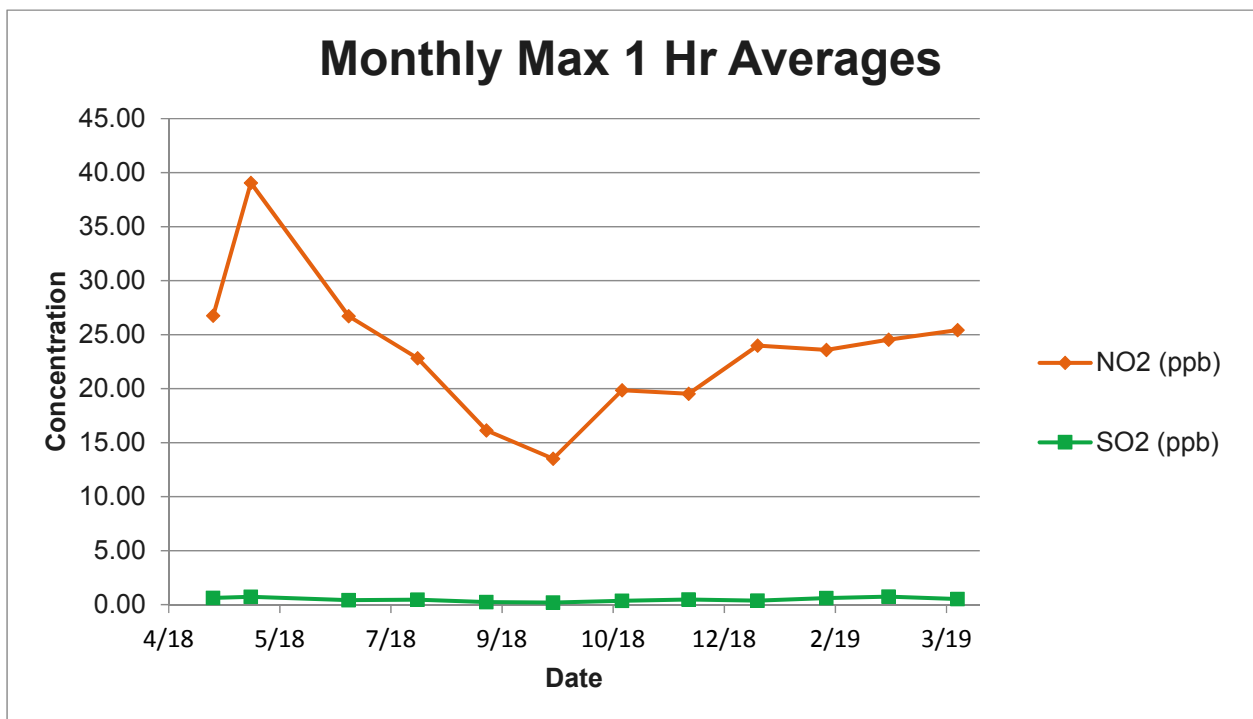


Figure 2-4. Monthly Max 1-hour Averages

### 3 COMPARISON TO NAAQS

Pollutant levels for all measured components at the Wando Welch ambient air monitoring station are below the National Ambient Air Quality Standards (NAAQS). This report marks the eight-year anniversary of the Wando monitoring station. Many of the NAAQS levels are based on three-year averages. These values have been calculated from the Wando data for comparison to the standard.

#### 3.1 NO<sub>2</sub>

The primary standard for NO<sub>2</sub> is 53 ppb (annual arithmetic average) or 100 ppb (3-year average of the 98th percentile of the daily maximum 1-hour average must not exceed 100 ppb). Table 2-4 and Figures 2-3 and 2-4 show that the monthly averages and monthly daily maximum 1-hr averages were below 53 ppb for this eighth year of monitoring (as they were for all previous years of monitoring). Table 2-5 presents the NO<sub>2</sub> NAAQS calculations for each standard.

Table 2-5. NO<sub>2</sub> NAAQS Calculations for Wando Welch Terminal

Pollutant	Primary/ Secondary	Averaging Time	Level	Form	Wando Welch
NO <sub>2</sub>	Primary	1-hour	100 ppb	98th Percentile, averaged over 3 years	55.3 ppb
NO <sub>2</sub>	Primary and Secondary	Annual	53 ppb	Annual Mean	Year 6: 9 ppb Year 7: 9 ppb Year 8: 10 ppb

#### 3.2 SO<sub>2</sub>

The primary standard for SO<sub>2</sub> is 75 ppb (3-year average of the 99th percentile of the daily maximum 1-hour average must not exceed 75 ppb). The secondary standard for SO<sub>2</sub> is 0.5 ppm (500 ppb; 3-hour average not to be exceeded more than once per year). Table 2-4 and Figures 2-3 and 2-4 show that the monthly averages and monthly daily maximum 1-hr averages were below 75 ppb for this eighth year of monitoring (as they were for all previous years of monitoring), and that the secondary standard was never exceeded. Table 2-6 presents the SO<sub>2</sub> NAAQS calculations for each standard.

Table 2-6. SO<sub>2</sub> NAAQS Calculations for Wando Welch Terminal

Pollutant	Primary/ Secondary	Averaging Time	Level	Form	Wando Welch
SO <sub>2</sub>	Primary	1-hour	75 ppb	99th Percentile of 1-hour daily maximum concentrations, averaged over 3 years	4.1 ppb
SO <sub>2</sub>	Secondary	3-hour	0.5 ppm (500 ppb)	Not to be exceeded more than once per year	3.06 ppb*

\* Maximum from 4/1/2018 to 3/31/2019.

### 3.3 PM<sub>2.5</sub>

The primary standard for PM<sub>2.5</sub> is 12.0 µg/m<sup>3</sup> (annual arithmetic average; 3-year average of the weighted annual mean PM<sub>2.5</sub> concentration must not exceed 12.0 µg/m<sup>3</sup>) or 35.0 µg/m<sup>3</sup> (24-hour average; 3-year average of the 98<sup>th</sup> percentile of the 24-hour concentrations must not exceed 35.0 µg/m<sup>3</sup>). The secondary standard for PM<sub>2.5</sub> is 15.0 µg/m<sup>3</sup> (annual arithmetic average; 3-year average of the weighted annual mean PM<sub>2.5</sub> concentration must not exceed 15.0 µg/m<sup>3</sup>). Table 2-7 presents the PM<sub>2.5</sub> NAAQS calculations for each standard, which shows that the Wando Welch Terminal had no exceedances.

**Table 2-7. PM<sub>2.5</sub> NAAQS Calculations for Wando Welch Terminal**

Pollutant	Primary/ Secondary	Averaging Time	Level	Form	Wando Welch
PM <sub>2.5</sub>	Primary	Annual	12 µg/m <sup>3</sup>	Annual mean, averaged over 3 years	11.1 µg/m <sup>3</sup>
PM <sub>2.5</sub>	Secondary	Annual	15 µg/m <sup>3</sup>	Annual mean, averaged over 3 years	11.1 µg/m <sup>3</sup>
PM <sub>2.5</sub>	Primary and Secondary	24-hour	35 µg/m <sup>3</sup>	98th Percentile, averaged over 3 years	33 µg/m <sup>3</sup>

## 4 QUALITY ASSURANCE/QUALITY CONTROL

QA/QC procedures applied to this project are described in a Quality Assurance Plan titled Continuous Air Monitoring Station for the Wando Welch Terminal (October 17, 2013, Revision 3).

### 4.1 Daily and Quarterly QC/Validation

According to the QAP prepared for this work, results are reviewed for anomalies and validated daily. These validations are recorded on QA/QC Daily Comment Sheets. The occurrence and duration of normal calibration and maintenance activities are also recorded.

Daily QC checks were performed in accordance with section 5.1 of the QAPP. The PAC Display data logging software is remotely accessed from the ARCADIS office in Durham, NC where the instrumentation is monitored for alarms and the data trends are reviewed for irregularities. NO<sub>x</sub> and SO<sub>2</sub> zero and calibration values displayed on the PAC Display screen from the previous calibration event are recorded in the QC Log Book. After checking the PAC Display system for any anomalies, the H05 raw data file from the previous day is downloaded to Arcadis' Durham, NC server. The data file is saved to the project folder on the server and then processed by a Microsoft Excel macro. The resulting Excel file provides values for daily averages and maxima as well as alarm and calibration information. This information is recorded on the daily QC log sheet. Comments and observations regarding data quality are noted on the QC log sheet and are also entered on the SCSPA QA/QC Daily Comment Sheet. The Project Manager is notified of any issues immediately.

Percent completeness for Quarter 1 was calculated by dividing both the number of hours flagged by the macro as "Insufficient Data" as well as hours for which no data was obtained by the total number of hours in the quarter. Each of the three instruments (5014i, 42i, and 43i) typically produces 24 hours of data each day, for a total of 72 hours per day of recorded data. One daily Excel file per week was validated by verifying the formulas and inputs used in the Microsoft Excel macro calculations are correct. The ranges used to calculate the PM 2.5 24-hour average, NO<sub>2</sub> Daily Max 1-hour average, SO<sub>2</sub> Daily Max 1-hour average, and the 24-hour averages for PM, NO, NO<sub>2</sub>, NO<sub>x</sub>, and SO<sub>2</sub> were checked during each validation. Four random hourly average ranges for PM, NO, NO<sub>2</sub>, NO<sub>x</sub>, and SO<sub>2</sub> were also checked during each validation.

The data for this quarter were assessed as follows:

- Percent completeness was 90.88%.
- 100% of the validated data were flagged as "good".

The QAP stated a completeness goal of 75% for PM<sub>2.5</sub>, SO<sub>2</sub> and NO<sub>x</sub>. The data collected from January 1, 2019 through March 31, 2019 met this goal.

Arcadis U.S., Inc.

4915 Prospectus Drive

Suite G

Durham, North Carolina 27713

Tel 919 544 4535

Fax 919 544 5690

[www.arcadis.com](http://www.arcadis.com)

A decorative graphic consisting of three thin orange lines. One line is horizontal, extending across the width of the page. Two other lines are diagonal, starting from the bottom left and extending towards the top right, intersecting the horizontal line.